


# HyperT

GUARANTEED

Easy access to main mechanical components

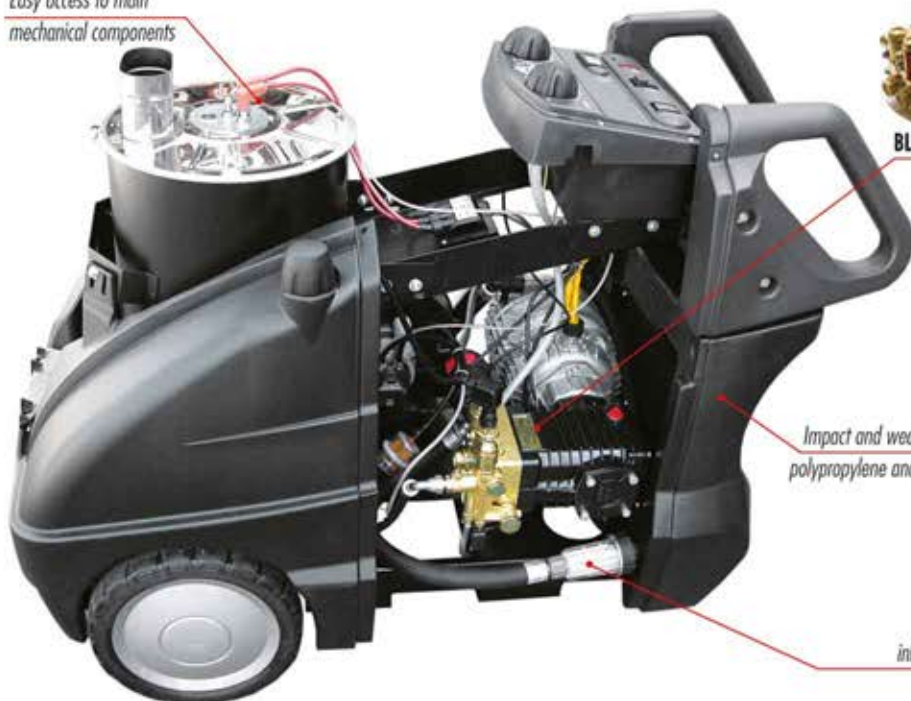

BL4 21-200

Impact and weather resistant, polypropylene and polyethylene

inlet water filter



only HyperT 2021



### Standard equipment:

- Gun with rotating coupling.
- Lance with nozzle-holder.
- Power cable 5 m
- High pressure hose 10 m



- Pressure accumulator for hose and gun vibrations prevention (only HyperT 2021 model).



- Integrated elastic joint, for best pump coupling.
- High (> 90%) thermal efficiency burner.



- Header tank and antiscaling device.

### Optional:

- Hose-reel with brake (hose not included) cod. 6.608.0010
- Antiscale LC-PRECAL (pcs. 4 x 5 lt.) cod. 3.697.0044



#### HYPER T 1515 LP

#### HYPER T 2015 LP

#### HYPER T 2021 LP

Code	8.623.0904	8.623.0905	8.623.0902
operat. pressure/max	30÷150 bar	30÷200 bar	30÷200 bar
operat. pressure/max	435÷2175 psi	435÷2900 psi	435÷2900 psi
delivery rate	345÷900 l/h	450÷900 l/h	630÷1260 l/h
delivery rate	1.52÷3.96 GPM	1.98÷3.96 GPM	2.77÷5.55 GPM
abs. power/voltage	5500W-400V-50Hz	7300-400V-50Hz	9700-400V-50Hz
RPM	1450	1450	1450
diesel tank/detergent tank/antiscaling	22/22/2,4 l.-5.82/5.82/0.63 gal	22/22/2,4 l.-5.82/5.82/0.63 gal	22/22/2,4 l.-5.82/5.82/0.63 gal
max temp. inlet/outlet	40 °C / 140 °C	40 °C / 140 °C	40 °C / 140 °C
fuel consumption/heat output	6.6 l/h - 1.25 gal/h / 88 kW	6.6 l/h - 1.25 gal/h / 88 kW	6.6 l/h / 88 kW
machine dimensions	125x69x89 cm	125x69x87 cm	125x69x89 cm
machine weight	170 Kg / 374 lbs	175 kg / 385 lbs	180 kg / 396 lbs