


Dab-NKP Rev 3 960918

لیست قیمت پمپهای سانتریفیوژ ایتالیایی مدل NKP (2800 دور) با شفت یکپارچه

| مدل              | ولتاژ (V) | KW   | HP  | آمپر (A) | حداکثر ارتفاع (m) | ارتفاع (m) | دبی (m <sup>3</sup> /h) | ورودی (mm) | خروجی (mm) | قیمت (ریال) |
|------------------|-----------|------|-----|----------|-------------------|------------|-------------------------|------------|------------|-------------|
| NKP 32-125.1/102 | 380       | 0.75 | 1   | 1.9      | 13                | 12.5-8     | 6-18                    | 50         | 32         |             |
| NKP 32-125.1/115 | 380       | 1.1  | 1.5 | 2.6      | 17.2              | 16.5-12.5  | 6-18                    | 50         | 32         |             |
| NKP 32-125.1/125 | 380       | 1.5  | 2   | 3.4      | 21                | 20-16.8    | 6-18                    | 50         | 32         |             |
| NKP 32-125.1/140 | 220       | 2.2  | 3   | 14       | 27                | 26-19.5    | 12-24                   | 50         | 32         |             |
| NKP 32-125.1/140 | 380       | 2.2  | 3   | 4.9      | 27                | 26-19.5    | 12-24                   | 50         | 32         |             |
| NKP 32-125/110   | 380       | 1.1  | 1.5 | 2.6      | 15.8              | 14.5-9.9   | 12-24                   | 50         | 32         |             |
| NKP 32-125/120   | 380       | 1.5  | 2   | 3.4      | 19.3              | 18.2-14.5  | 12-24                   | 50         | 32         |             |
| NKP 32-125/130   | 220       | 2.2  | 3   | 14       | 23.6              | 23-16.8    | 12-30                   | 50         | 32         |             |
| NKP 32-125/130   | 380       | 2.2  | 3   | 4.9      | 23.6              | 23-16.8    | 12-30                   | 50         | 32         |             |
| NKP 32-125/142   | 220       | 3    | 4   | 18       | 28.6              | 27.6-17.9  | 12-36                   | 50         | 32         |             |
| NKP 32-125/142   | 380       | 3    | 4   | 6.4      | 28.6              | 27.6-17.9  | 12-36                   | 50         | 32         |             |
| NKP 32-160.1/155 | 220       | 2.2  | 3   | 14       | 29.2              | 26.5-20.5  | 12-18                   | 50         | 32         |             |
| NKP 32-160.1/155 | 380       | 2.2  | 3   | 4.9      | 29.2              | 26.5-20.5  | 12-18                   | 50         | 32         |             |
| NKP 32-160.1/166 | 220       | 3    | 4   | 18       | 35.3              | 33-28      | 12-18                   | 50         | 32         |             |
| NKP 32-160.1/166 | 380       | 3    | 4   | 6.4      | 35.3              | 33-28      | 12-18                   | 50         | 32         |             |
| NKP 32-160/151   | 220       | 3    | 4   | 18       | 30.5              | 29-19.5    | 12-30                   | 50         | 32         |             |
| NKP 32-160/151   | 380       | 3    | 4   | 6.4      | 30.5              | 29-19.5    | 12-30                   | 50         | 32         |             |
| NKP 32-160/163   | 220       | 4    | 5.5 | 24       | 36.2              | 35-22      | 12-36                   | 50         | 32         |             |
| NKP 32-160/163   | 380       | 4    | 5.5 | 8.5      | 36.2              | 35-22      | 12-36                   | 50         | 32         |             |
| NKP 32-160/177   | 380       | 5.5  | 7.5 | 10.6     | 43.5              | 42.6-25.5  | 12-42                   | 50         | 32         |             |
| NKP 32-200.1/188 | 220       | 4    | 5.5 | 24       | 45.3              | 40.8-26.8  | 12-24                   | 50         | 32         |             |
| NKP 32-200.1/188 | 380       | 4    | 5.5 | 8.5      | 45.3              | 40.8-26.8  | 12-24                   | 50         | 32         |             |
| NKP 32-200.1/205 | 380       | 5.5  | 7.5 | 10.6     | 56.6              | 52-36.2    | 12-24                   | 50         | 32         |             |
| NKP 32-200/190   | 380       | 5.5  | 7.5 | 10.6     | 46.9              | 45-29      | 12-36                   | 50         | 32         |             |
| NKP 32-200/210   | 380       | 7.5  | 10  | 14.1     | 58.8              | 57-44      | 12-36                   | 50         | 32         |             |
| NKP 40-125/107   | 380       | 1.5  | 2   | 3.4      | 14.7              | 14.3-7     | 12-48                   | 65         | 40         |             |
| NKP 40-125/120   | 220       | 2.2  | 3   | 14       | 19                | 18.4-11    | 12-48                   | 65         | 40         |             |
| NKP 40-125/120   | 380       | 2.2  | 3   | 4.9      | 19                | 18.4-11    | 12-48                   | 65         | 40         |             |
| NKP 40-125/130   | 220       | 3    | 4   | 18       | 22.8              | 22.3-13.5  | 12-54                   | 65         | 40         |             |
| NKP 40-125/130   | 380       | 3    | 4   | 6.4      | 22.8              | 22.3-13.5  | 12-54                   | 65         | 40         |             |
| NKP 40-125/139   | 220       | 4    | 5.5 | 24       | 26.4              | 26-15      | 12-60                   | 65         | 40         |             |
| NKP 40-125/139   | 380       | 4    | 5.5 | 8.5      | 26.4              | 26-15      | 12-60                   | 65         | 40         |             |
| NKP 40-160/158   | 380       | 5.5  | 7.5 | 10.6     | 33.7              | 34-24      | 18-54                   | 65         | 40         |             |
| NKP 40-160/172   | 380       | 7.5  | 10  | 14.1     | 40.7              | 40.2-26.5  | 18-66                   | 65         | 40         |             |
| NKP 40-200/210   | 380       | 11   | 15  | 20.4     | 57.1              | 56.8-39    | 18-66                   | 65         | 40         |             |
| NKP 40-250/230   | 380       | 15   | 20  | 27.5     | 72.5              | 72-51.5    | 24-66                   | 65         | 40         |             |
| NKP 40-250/245   | 380       | 18.5 | 25  | 33.5     | 83                | 82.5-58.5  | 24-72                   | 65         | 40         |             |
| NKP 40-250/260   | 380       | 22   | 30  | 39.5     | 96                | 94.5-71.5  | 24-72                   | 65         | 40         |             |
| NKP 50-125/115   | 220       | 3    | 4   | 18       | 17                | 16.5-9     | 24-84                   | 65         | 50         |             |
| NKP 50-125/115   | 380       | 3    | 4   | 6.4      | 17                | 16.5-9     | 24-84                   | 65         | 50         |             |
| NKP 50-125/125   | 220       | 4    | 5.5 | 24       | 20.5              | 20-11.5    | 24-90                   | 65         | 50         |             |
| NKP 50-125/125   | 380       | 4    | 5.5 | 8.5      | 20.5              | 20-11.5    | 24-90                   | 65         | 50         |             |
| NKP 50-125/135   | 380       | 5.5  | 7.5 | 10.6     | 24                | 23.6-13.4  | 24-102                  | 65         | 50         |             |
| NKP 50-125/144   | 380       | 7.5  | 10  | 14.1     | 28                | 27.8-15.5  | 24-114                  | 65         | 50         |             |
| NKP 50-160/153   | 380       | 7.5  | 10  | 14.1     | 31.9              | 31-23.5    | 24-90                   | 65         | 50         |             |
| NKP 50-160/169   | 380       | 11   | 15  | 20.4     | 39.6              | 39.5-32.5  | 30-90                   | 65         | 50         |             |
| NKP 50-200/200   | 380       | 15   | 20  | 27.5     | 55.1              | 54.7-41    | 36-90                   | 65         | 50         |             |
| NKP 50-200/210   | 380       | 18.5 | 25  | 33.5     | 61.7              | 61.6-43    | 36-102                  | 65         | 50         |             |
| NKP 50-200/219   | 380       | 22   | 30  | 39.5     | 67.7              | 67.4-50    | 36-102                  | 65         | 50         |             |
| NKP 50-250/230   | 380       | 22   | 30  | 39.5     | 73.6              | 73.1-49    | 36-102                  | 65         | 50         |             |
| NKP 50-250/257   | 380       | 30   | 40  | 52.5     | 93                | 92.3-72    | 36-102                  | 65         | 50         |             |

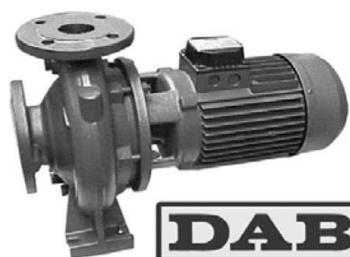

خصوصیات پمپهای سانتریفیوژ (با شفت یکپارچه) NKP :

۱- مصارف آبرسانی سیرکولاتور آب سرد (۱۰°C-) و آب گرم (۱۴°C+)

۲- استفاده در برجهای خنک کننده و گردش آب .

۳- برای مصارف کشاورزی - باغبانی و صنعتی و پروژه های پمپاژ آب.